



Rotary Power Chuck

- ▲ Built in rotary cylinder
- ▲ No draw tube, no rotary cylinder required
- ▲ Extra large piston, provide high clamping force
- ▲ Center through hole, able to arrange auto feeding
- ▲ Best budget solution for manual lathe into automation
- ▲ No fluid direct to the chuck body
- ▲ JA7-44 / JH7-44 is able to switch to expanding mandrel
See expanding kit at Page 15




(Collet Style)




(Jaw Style)

Collet Style Chuck

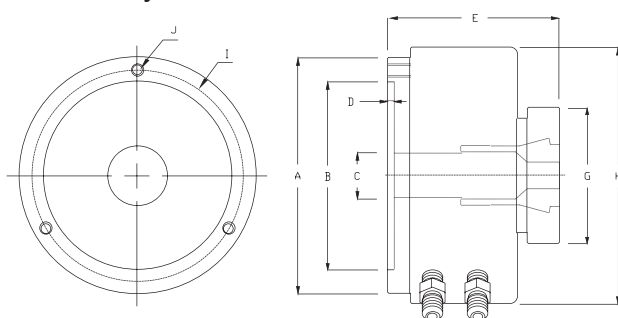

Jaw Style Chuck

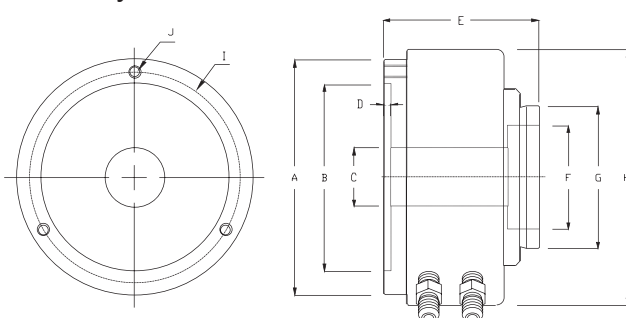

Introduction

It used to be complex for users to convert a manual lathe into one with power workholding device since setting up a hydraulic system is quite troublesome. JATO Rotary Power Chuck is specially designed to help users to set up a power chuck in a low cost and easy way. With its built-in rotary actuator, the Rotary Power Chuck can be installed and start working in less than 20 minutes.

Rotary Power Chuck comes with both air chuck and hydraulic chuck models that range from small sizes to large ones, giving users more options to choose from. Rotary Power Chuck now is widely applied to convert manual lathes to semi-auto ones with power workholding system, or is applied to build special purpose machines.

Collet Style Power Chuck

Model	JA7-44	JH7-44
A	192(7.56")	192(7.56")
B	155(6.10")	155(6.10")
C	44(1.73")	44(1.73")
D	5(0.20")	5(0.20")
E	135(5.31")	135(5.31")
F	-	-
G	107(4.21")	107(4.21")
H	212(8.35")	212(8.35")
I (P.C.D)	172(6.77")	172(6.77")
J	3H-M10 (rear)	3H-M10 (rear)
Collet/ Jaw	C-44 Collet C-44I Expanding Kit	C-44 Collet C-44I Expanding Kit
Air/ Hydraulic	Air	Hydraulic
Operating Pressure	2-20kg/cm ² (28-286psi)	2-20kg/cm ² (28-286psi)
Max. RPM	1600	1600
Max. Capacity (Through/None)	44mm(1.73")	44mm(1.73")
Piston Area	117cm ² (18in ²)	117cm ² (18in ²)
Gripping Force	4725kgf@7kg/cm ² (12020lbf@100psi)	10800kgf@16kg/cm ² (24040lbf@229psi)
Net Weight	17kgs(37.4lbs)	17kgs(37.4lbs)

Jaw Style Power Chuck - Air

JA5-25	JA7-40	JA7-70
135(5.31")	192(7.56")	192(7.56")
100(3.94")	155(6.10")	155(6.10")
25(0.98")	45(1.77")	68(2.68")
4(0.16")	4.5(0.18")	5(0.20")
102(4.02")	126(4.96")	141(5.55")
45(1.77")	65(2.56")	105(4.13")
68(2.68")	94(3.70")	136(5.35")
170(6.69")	212(8.35")	265(10.43")
115(4.53")	172(6.77")	172(6.77")
3H-M8 (rear)	3H-M10 (rear)	3H-M10 (rear)
C-25 Jaw	C-40 Jaw	C-70 Jaw
Air	Air	Air
2-9kg/cm ² (28-130psi)	2-9kg/cm ² (28-130psi)	2-9kg/cm ² (28-130psi)
1800	1600	1400
25mm/32mm (0.98"/1.26")	45mm/50mm (1.77"/1.97")	68mm/90mm (2.68"/3.54")
115cm ² (17.8in ²)	182cm ² (28.2in ²)	329cm ² (50.8in ²)
2254kgf@7kg/cm ² (4958lbf@100psi)	3567kgf@7kg/cm ² (7847lbf@100psi)	6429kgf@7kg/cm ² (14143lbf@100psi)
7.5kgs(16.5lbs)	15.0kgs(33.0lbs)	22.5kgs(49.5lbs)


Jaw Style Power Chuck - Hydraulic

Model	JH5-25	JH7-40	JH7-70	JH9-90	JH9-120
A	135(5.31")	192(7.56")	192(7.56")	230(9.06")	229(9.02")
B	100(3.94")	155(6.10")	155(6.10")	190(7.48")	190(7.48")
C	25(0.98")	45(1.77")	68(2.68")	88(3.52")	118(4.65")
D	4.0(0.16")	4.5(0.18")	5.0(0.20")	5.5(0.22")	5.5(0.22")
E	102(4.02")	126(4.96")	141(5.55")	150(5.91")	157(6.18")
F	45(1.77")	65(2.56")	105(4.13")	105(4.13")	140(5.51")
G	68(2.68")	94(3.70")	136(5.35")	136(5.35")	168(6.61")
H	138(5.43")	190(7.48")	211(8.31")	232(9.13")	275(10.83")
I (P.C.D.)	115(4.53")	172(6.77")	172(6.77")	210(8.27")	210(8.27")
J	3H-M8 (rear)	3H-M10 (rear)	3H-M10 (rear)	3H-M12 (rear)	3H-M12 (rear)
Jaw	C-25 Jaw	C-40 Jaw	C-70 Jaw	C-90 Jaw	C-120 Jaw
Air/ Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Operating Pressure	10-25kg/cm ² (143-357psi)	10-20kg/cm ² (143-286psi)	10-20kg/cm ² (143-286psi)	10-15kg/cm ² (143-214psi)	10-15kg/cm ² (143-214psi)
Max. RPM	1800	1600	1400	1100	900
Max. Capacity (Through/None)	25mm/32mm (0.98"/1.26")	45mm/50mm (1.77"/1.97")	68mm/90mm (2.68"/3.54")	88mm/88mm (3.52"/3.52")	118mm/118mm (4.65"/4.65")
Piston Area	56cm ² (8.68in ²)	85cm ² (13.1in ²)	117cm ² (18.1in ²)	133cm ² (20.7in ²)	183cm ² (28.4in ²)
Gripping Force	2508kgf@16kg/cm ² (5519lbf@228psi)	4032kgf@16kg/cm ² (8870lbf@228psi)	5197kgf@16kg/cm ² (11433lbf@228psi)	5913kgf@16kg/cm ² (13009lbf@228psi)	6148kgf@12kg/cm ² (13528lbf@171psi)
Net Weight	6.0kgs(13.2lbs)	13.0kgs(28.6lbs)	18.0kgs(39.6lbs)	24.0kgs(52.8lbs)	30.0kgs(66.0lbs)



Rotary Power Chuck for Both Gripping and Expanding


(JA7-44/JH7-44)

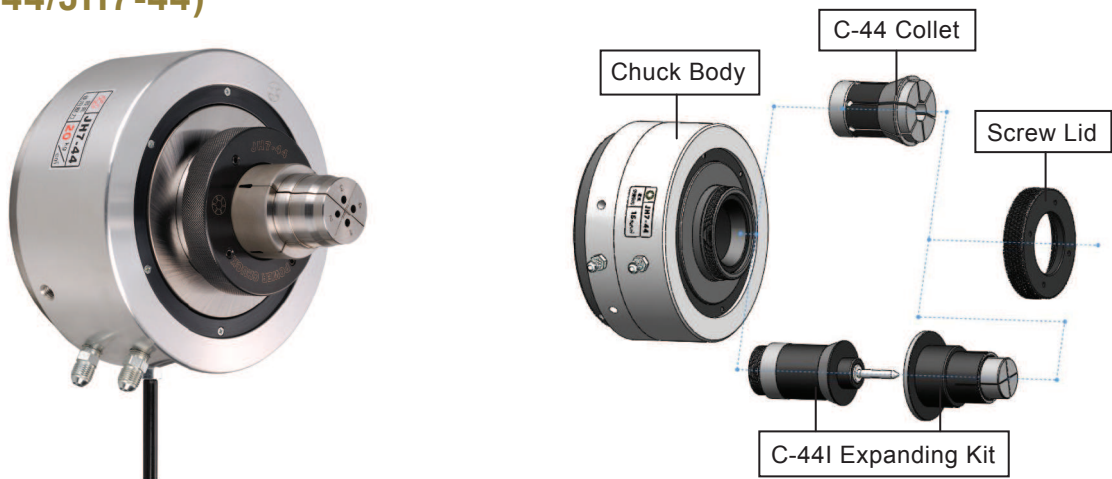

JA7-44/JH7-44 can work with C-44 collet to gripping O.D purpose; also can be switching to I.D clamping as a mandrel by install the expanding kits. The expanding kit including a push mandrel, a pin, and a C-44I expanding collet, which C-44I collet is make by order. Please join our website to see how to order a C-44I collet in the [Download]


Jaw Pad for Jato Power Rotary and Stationary Chuck

Model Sheet with Jaw Pad

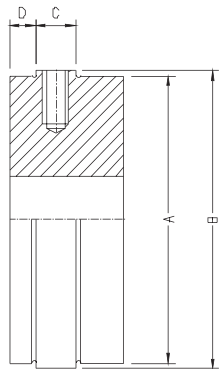


Model	A	B	C	D	Bolts	Working Chuck
C-25	45mm (1.77")	47.5mm (1.87")	7mm (0.28")	3.5mm (0.13")	M5x10	JA5-25/JH5-25
C-40	65mm (2.56")	67.5mm (2.66")	9mm (0.35")	6.0mm (0.24")	M6x12	JA7-40/JH7-40 JAS-40/JHS-40/CAF-40
C-70	105mm (4.13")	107.5mm (4.23")	9mm (0.35")	6.0mm (0.24")	M6x12	JA7-70/JH7-70/JH9-90 JHS-70/CAF-70
C-120	140mm (5.51")	143.5mm (5.65")	9mm (0.35")	6.0mm (0.24")	M6x14	JH9-120


Varies Type of Jaw Pad



Through Hole




Step



Serrated



Square, Hexagon



Extra length